




The spray system produces clear and transparent ice cubes and the patented **Bright Cube** shape grants a longer lasting cube for you to enjoy your cold drinks

Self contained ice maker.  
Up to 22kg production per 24/hr of medium ice cube.  
7kg storage bin.  
Complete with legs, water & drain hoses + 1 ice scoop.  
10 AMP power supply.  
215 mm drain height including legs to finished floor.




## ICE PRODUCTION



### Air Cooled Unit

Air Temp.		Water Temperature			
		32°	21°	15°	10°
°C		21°	15°	10°	
°F		70°	60°	50°	
10°	<b>17</b>	<b>21</b>	<b>22</b>	<b>24</b>	
50°	37	46	49	53	
21°	<b>16</b>	<b>20</b>	<b>21</b>	<b>23</b>	
70°	35	44	46	51	
32°	<b>14</b>	<b>18</b>	<b>19</b>	<b>21</b>	
90°	31	40	42	46	
38°	<b>12</b>	<b>15</b>	<b>16</b>	<b>17</b>	
100°	26	33	35	37	

### Water Cooled Unit

Air Temp.		Water Temperature			
		32°	21°	15°	10°
°C		21°	15°	10°	
°F		70°	60°	50°	
10°	<b>20</b>	<b>20.5</b>	<b>21.5</b>	<b>22.5</b>	
50°	44	45	47	50	
21°	<b>19.5</b>	<b>20</b>	<b>21</b>	<b>22</b>	
70°	43	44	46	49	
32°	<b>16.5</b>	<b>17.5</b>	<b>18.5</b>	<b>19.5</b>	
90°	36	39	41	43	
38°	<b>15</b>	<b>16</b>	<b>17</b>	<b>18</b>	
100°	33	35	37	40	

## CUBE TYPE



**20g weight**  
**BRIGHT CUBE**  
32mm x 35mm x 37mm

The Bright Ice Cube, appreciated for its versatility, is perfect for use in ice buckets, whiskey on the rocks, cocktails and appetisers. The crystal clear appearance of the Bright Cube makes it essential when a high quality is required.

## CONTROL PANEL



Switch On/Off


Ice size regulation screw


## BIN CAPACITY

7 Kg - 15.4 lbs | 350 pcs

## DIMENSIONS

W x D x H (mm)

 400 x 480 x 600/720

 460 x 540 x 760

## OPERATING REQUIREMENTS

Rejected Heat 1056 W





Air Volume 185 m<sup>3</sup>/h
















220-240/50/1




R134a GWP = 1430




MIN		MAX
10°C (50°F)		40°C (104°F)
5°C (41°F)		35°C (95°F)
- 10 %		+ 10 %
1 Bar (14 psi)		5 Bar (70 psi)

## SPECIFICATIONS



	 cond	 comp. W	 ABS. W	 Fuse	 kWh/100kg	 L / hr	 kg	 lbs	 kg	 lbs	 Ton CO2 equiv.
<b>CS25 A</b>		667	460	10	42.7	2.08	34	75	42	93	0.329
<b>CS25 W</b>		667	410	10	37.5	32.3	34	75	42	93	0.286

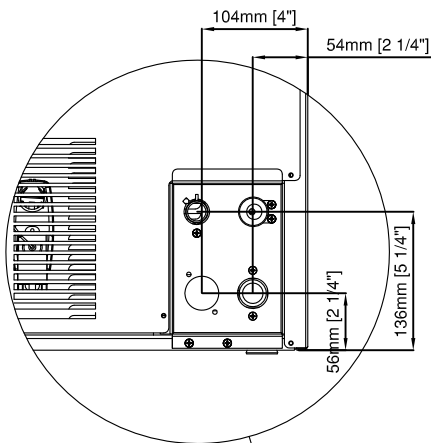



Back View  
Vista Posteriore

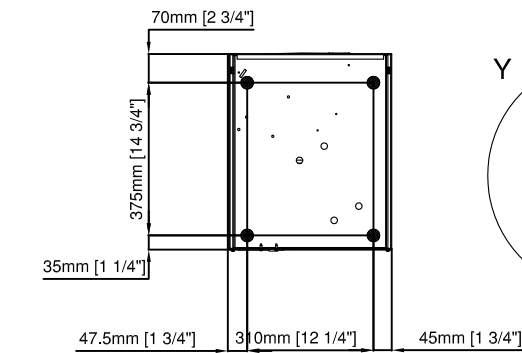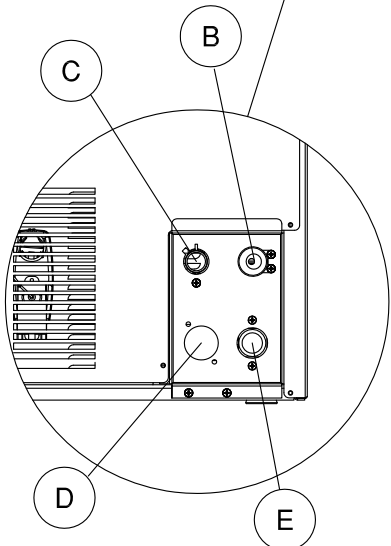

Front View  
Vista Frontale

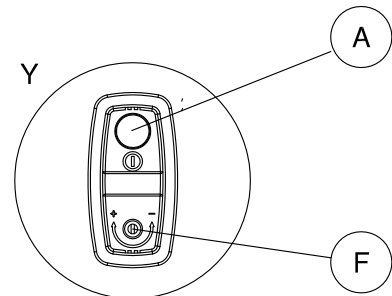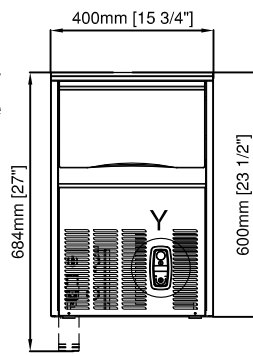

Top View  
Vista Superiore

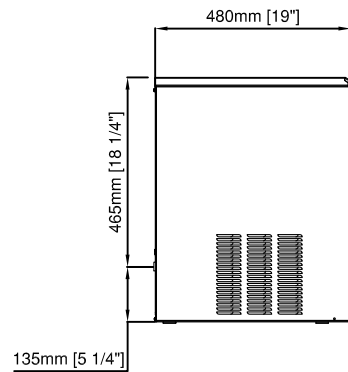

Lateral View  
Vista Laterale

- A** Switch On/Off
- B** Electrical cable supply
- C** Water outlet connection 20mm diam.
- D** Water outlet connection water condensation 20mm diam.
- E** Water inlet connection 3/4" gas
- F** Ice size regulation screw